U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORM	IATION	FOR INSUR	ANCE COMPANY USE
A1. Building Owner's Name	Policy Numi	oer:	
Herzog			
 A2. Building Street Address (including Apt., Unit, Suite, and/or Box No. 10215 Sunrise Drive 	Bldg. No.) or P.O. Route and	Company N	AIC Number:
City	State	ZIP Code	
Borough of Stone Harbor	New Jersey	08247	
A3. Property Description (Lot and Block Numbers, Tax Parcel Lots 523 and 524 in Block 200.03	Number, Legal Description, et	c.)	
A4. Building Use (e.g., Residential, Non-Residential, Addition,	Accessory, etc.) Residentia	al	
A5. Latitude/Longitude: Lat. 39°03'01.6" Long74	4°45'53.6" Horizonta	I Datum: NAD 1	927 🗙 NAD 1983
A6. Attach at least 2 photographs of the building if the Certifica	te is being used to obtain floo	d insurance.	
A7. Building Diagram Number 6			
A8. For a building with a crawlspace or enclosure(s):			
-	/1638.00 sq ft		
b) Number of permanent flood openings in the crawlspace		above adjacent gra	de 7
c) Total net area of flood openings in A8.b		3	
	<u> </u>		
d) Engineered flood openings? 🖂 Yes 🗌 No			
A9. For a building with an attached garage:			
a) Square footage of attached garage	sq ft		
b) Number of permanent flood openings in the attached ga	rage within 1.0 foot above adj	acent grade	
c) Total net area of flood openings in A9.b	sq in		
d) Engineered flood openings? Yes No			
s, anguieres nece spanniger		i	
SECTION B - FLOOD INSURAN	ICE RATE MAP (FIRM) INF	ORMATION	
,	B2. County Name		B3. State
Borough of Stone Harbor 345323	Cape May County		New Jersey
B4. Map/Panel B5. Suffix B6. FIRM Index B7. FIRM Number B7. Paris		B9. Base Flood El (Zone AO, use	evation(s) e Base Flood Depth)
34009C0242 F 10-05-2017 10-05-20		10	
B10. Indicate the source of the Base Flood Elevation (BFE) dat ☐ FIS Profile ☒ FIRM ☐ Community Determined ☐			
B11. Indicate elevation datum used for BFE in Item B9: NG	VD 1929 ⊠ NAVD 1988		
D40 to the building leasted in a Contact Danier Danier Contact	tom (CDDC) area or Otherwis	a Protected Area (C	NDAN2 TO Vac TO No
B12. Is the building located in a Coastal Barrier Resources Sys		e Flotected Area (C	/r/)! [] Tes [X] NO
Designation Date: CBRS [_) OPA		
			_

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding	information from S	ection A.	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or 10215 Sunrise Drive	r Bldg. No.) or P.O. Ro	oute and Box No.	Policy Number:	
City Sta Borough of Stone Harbor New		Code 247	Company NAIC Number	
SECTION C - BUILDING EL	EVATION INFORMA	TION (SURVEY RE	EQUIRED)	
SECTION C – BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) C1. Building elevations are based on:				
structural support			4.70 X feet meters	
SECTION D – SURVEYOR, This certification is to be signed and sealed by a land sur I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment un Were latitude and longitude in Section A provided by a lice	veyor, engineer, or ar my best efforts to inte der 18 U.S. Code, Se	chitect authorized by erpret the data availa- ction 1001.	law to certify elevation information.	
Certifier's Name Stephen C. Martinelli Title Professional Land Surveyor Company Name The Martinelli Group LLC Address 1217 S.Shore Road Suite 106 City	License Number 30089	ZIP Code	Place Seal Here	
Ocean View	New Jersey	08230	, -	
Signature	Date 07-25-2018	Telephone (609) 390-9618	Ext.	
Copy all pages of this Elevation Certificate and all attachme	nts for (1) community of	official, (2) insurance a	gent/company, and (3) building owner.	
Comments (including type of equipment and location, per There are (6) Smart Vents Model #1540-510 and (1) 29"x Model #1540-510 in an 301sq foot storage enclosure with enclosure walls are manufactured breakaway walls. (See the Building. CK by:SCM(fjs)	20" opening located i an elevation of 6.0(N	AVD 88) not shown i	n section A8 a.(See Attached). All	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspon	ding information	1 from Section A.		FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, ar 10215 Sunrise Drive	nd/or Bldg. N o.) o	r P.O. Route and Box	No.	Policy Number:
City	State	ZIP Code		Company NAIC Number
Borough of Stone Harbor	New Jersey	08247		
SECTION E – BUILDING E FOR ZON		ORMATION (SURVE) NE A (WITHOUT BFE		REQUIRED)
For Zones AO and A (without BFE), complete Items E complete Sections A, B,and C. For Items E1–E4, use enter meters.	:1–E5. If the Certi natural grade, if a	ficate is intended to su available. Check the m	pport a easurer	LOMA or LOMR-F request, nent used. In Puerto Rico only,
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest a) Top of bottom floor (including basement,	d check the appro adjacent grade (opriate boxes to show t LAG).	whether	the elevation is above or below
crawlspace, or enclosure) is] meters	s above or below the HAG.
 b) Top of bottom floor (including basement, crawlspace, or enclosure) is] meters	s above or below the LAG.
E2. For Building Diagrams 6–9 with permanent flood	openings provide	d in Section A Items 8	and/or	9 (see pages 1–2 of Instructions),
the next higher floor (elevation C2.b in the diagrams) of the building is		feet [] meters	s above or below the HAG.
E3. Attached garage (top of slab) is] meters	s above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is] meters	s above or below the HAG.
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	ole, is the top of th	ne bottom floor elevate own. The local official	d in acc I must c	cordance with the community's certify this information in Section G.
SECTION F - PROPERTY OW	NER (OR OWNE	R'S REPRESENTATI	VE) CE	RTIFICATION
The property owner or owner's authorized representat community-issued BFE) or Zone AO must sign here. T	ive who complete	s Sections A, B, and E Sections A, B, and E	for Zor	ne A (without a FEMA-issued or ect to the best of my knowledge.
Property Owner or Owner's Authorized Representative	e's Name			
Address		City	Sta	ite ZIP Code
Signature		Date	Tele	ephone
Comments				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: in these spaces, copy the corr	esponding information f	from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S 10215 Sunrise Drive	uite, and/or Bldg. No.) or F	P.O. Route and Box N o.	Policy Number:
City Borough of Stone Harbor	State New Jersey	ZIP Code 08247	Company NAIC Number
SECTIO	ON G - COMMUNITY INF	ORMATION (OPTIONAL)	Annual Company of the
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complete the	community's floodplain ma applicable item(s) and sign	nagement ordinance can complete below. Check the measurement
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)			
G2. A community official completed Section Zone AO.	on E for a building located	d in Zone A (without a FEM	A-issued or community-issued BFE)
G3. The following information (Items G4–	G10) is provided for comm	munity floodplain managem	ent purposes.
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued
			4 51(4
G7. This permit has been issued for:	New Construction St	ubstantial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	basement) (3.	.c 🔀 feet	meters Datum Natur 1988
G9. BFE or (in Zone AO) depth of flooding at t	he building site:	feet	meters Datum Natural 1988
G10. Community's design flood elevation:		Z.O 🔀 feet	meters Datum NAID 1986
Local Official's Name MICHAEL KOCHEM		itle CONSTRU	STION OFFICIAL
Community Name	T	elephone	· · · · · · · · · · · · · · · · · · ·
BOROUGH OF STONE		609.3	68.6814
Signature	_	0ate 2131118	
Comments (including type of equipment and loc	ation, per C2(e), if applica	able)	
			Check here if attachments.
			_

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 10215 Sunrise Drive			FOR INSURANCE COMPANY USE	
			Policy Number:	
City	State	ZIP Code	Company NAIC Number	
Borough of Stone Harbor	New Jersey	08247		

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption Front View 7-24-18

ELEVATION CERTIFICATE

Clear Photo One



Photo Two Caption Rear View 7-24-18 Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 10215 Sunrise Drive			Policy Number:	
City	State	ZIP Code	Company NAIC Number	
Borough of Stone Harbor	New Jersey	08247		

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption Heater Unit 7-24-18

Clear Photo Three

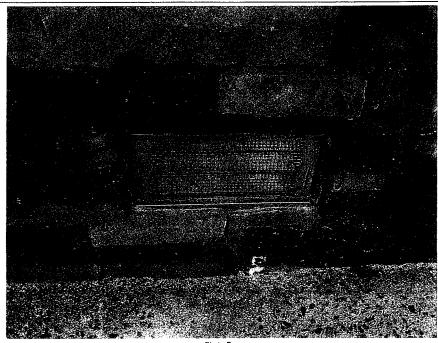


Photo Four Caption Smart Vent 7-24-18

Clear Photo Four

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Policy Number: Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 10215 Sunrise Drive City State ZIP Code Company NAIC Number 08247 Borough of Stone Harbor New Jersey

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken, "Front View" and "Rear View", and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption 29"x20" Opening 7-24-18 Clear Photo One

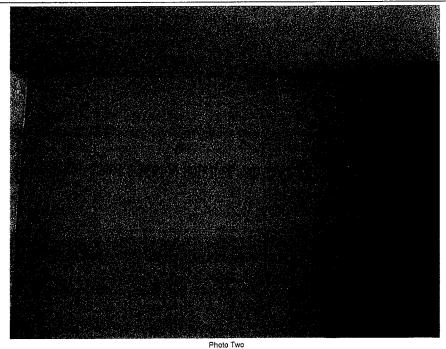


Photo Two Caption Manufactured Breakaway Walls 7-24-18 Clear Photo Two



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2017 This report is subject to renewal 02/2019.

DIVISION: 08 00 00-OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.







ICC-ES Evaluation Report

ESR-2074

Reissued February 2017
Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.
430 ANDBRO DRIVE, UNIT 1
PITMAN, NEW JERSEY 08071
(877) 441-8368
www.smartvent.com
info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC, 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent[®] FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with \$^{1}_4\$-inch-by-\$^{1}_4\$-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be

installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®]	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT [®] Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

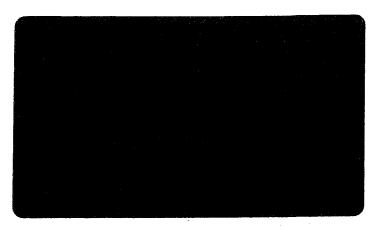


FIGURE 1-SMART VENT: MODEL 1540-510

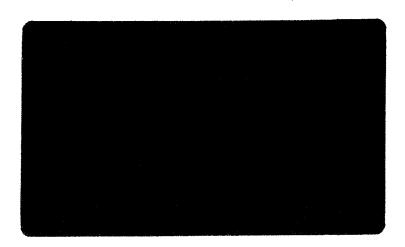


FIGURE 2—SMART VENT MODEL 1540-520

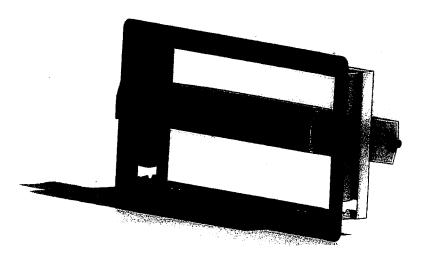


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Issued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted below

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the International Wildland-Urban Interface Code®.

This supplement expires concurrently with the master report, reissued February 2017 and revised November 2017.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2017 Revised November 2017 This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the Florida Building Code-Building and the FRC, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code-Building and the Florida Building Code-Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2017 and revised November 2017.



Page 5 of 5

DIAGRAM 3

All split-level buildings that are slab-on-grade, either detached or row type (e.g., townhouses); with or without attached garage.

Distinguishing Feature – The bottom floor (excluding garage) is at or above ground level (grade) on at least 1 side.*

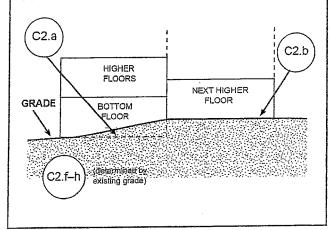


DIAGRAM 4

All split-level buildings (other than slab-on-grade), either detached or row type (e.g., townhouses); with or without attached garage.

Distinguishing Feature – The bottom floor (basement or underground garage) is below ground level (grade) on all sides.*

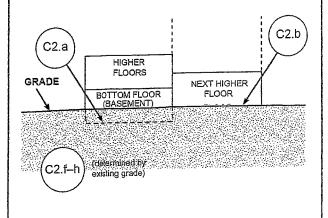


DIAGRAM 5

All buildings elevated on piers, posts, piles, columns, or parallel shear walls. No obstructions below the elevated floor.

Distinguishing Feature – For all zones, the area below the elevated floor is open, with no obstruction to flow of floodwaters (open lattice work and/or insect screening is permissible).


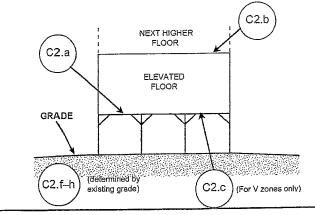


DIAGRAM 6


All buildings elevated on piers, posts, piles, columns, or parallel shear walls with full or partial enclosure below the elevated floor.


Distinguishing Feature – For all zones, the area below the elevated floor is enclosed, either partially or fully. In A Zones, the partially or fully enclosed area below the elevated floor is with or without openings** present in the walls of the enclosure. Indicate information about enclosure size and openings in Section A – Property Information.

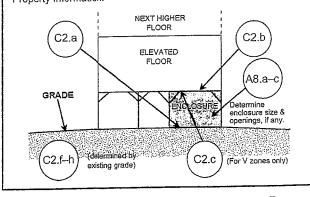

- * A floor that is below ground level (grade) on all sides is considered a basement even if the floor is used for living purposes, or as an office, garage, workshop, etc.
- ** An "opening" is a permanent opening that allows for the free passage of water automatically in both directions without human intervention.

 Under the NFIP, a minimum of 2 openings is required for enclosures or crawlspaces. The openings shall provide a total net area of not less than 1 square inch for every square foot of area enclosed, excluding any bars, louvers, or other covers of the opening. Alternatively, an Individual Engineered Flood Openings Certification or an Evaluation Report issued by the International Code Council Evaluation Service (ICC ES) must be submitted to document that the design of the openings will allow for the automatic equalization of hydrostatic flood forces on exterior walls. A window, a door, or a garage door is not considered an opening; openings may be installed in doors. Openings shall be on at least 2 sides of the enclosed area. If a building has more than 1 enclosed area, each area must have openings to allow floodwater to directly enter. The bottom of the openings must be no higher than 1.0 foot above the higher of the exterior or interior grade or floor immediately below the opening. For more quidance on openings, see NFIP Technical Bulletin 1.

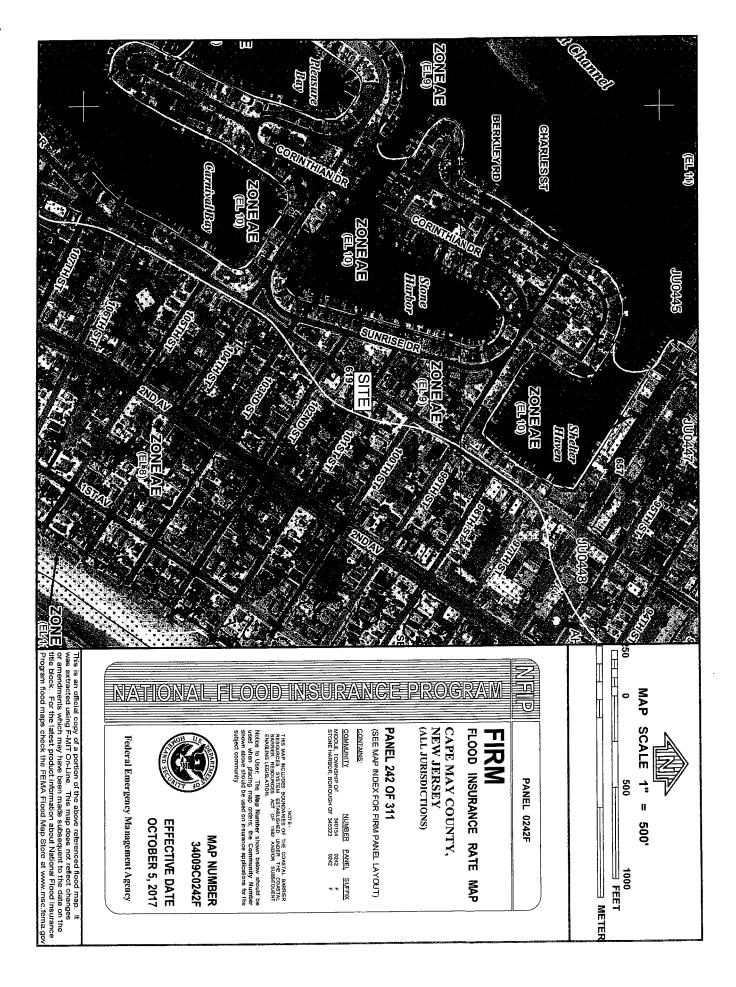

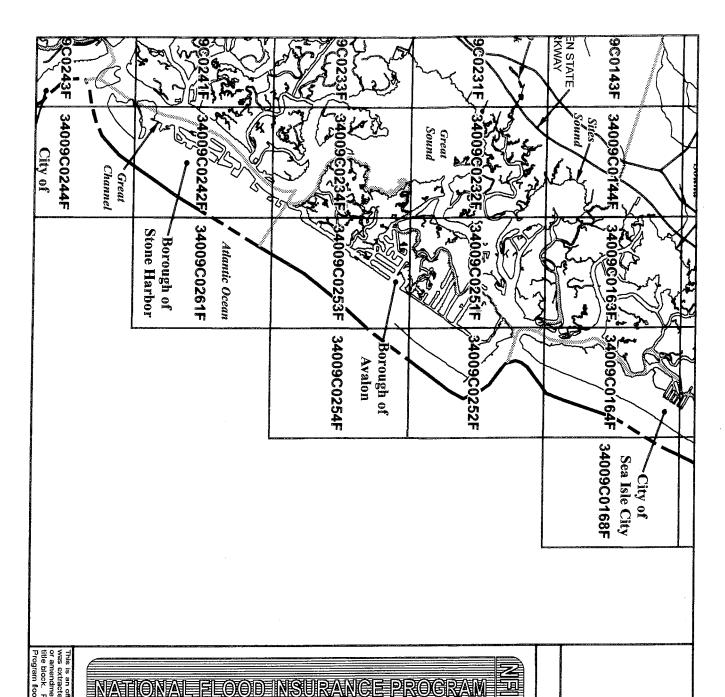



NATIONAL FLOXOD INSURANCE PROXERAM

NEW JERSEY (ALL JURISDICTIONS) CAPE MAY COUNTY, FLOOD INSURANCE RATE (D)

MAP INDEX

FIRM

MAP

MAP INDEX

PANELS PRINTED: 29, 37, 41, 42, 43, 44, 61, 62, 63, 64, 66, 67, 68, 69, 86, 87, 88, 89, 91, 93, 106, 107, 108, 109, 116, 117, 119, 127, 128, 128, 131, 132, 133, 134, 136, 137, 138, 139, 41, 142, 143, 144, 161, 152, 163, 164, 165, 167, 208, 209, 216, 217, 218, 219, 231, 232, 233, 234, 236, 237, 238, 239, 231, 232, 233, 234, 236, 237, 238, 239, 231, 232, 233, 234, 236, 237, 238, 239, 231, 232, 233, 234, 236, 237, 238, 239, 231, 232, 233, 234, 236, 237, 238, 239, 231, 232, 233, 234, 236, 237, 239, 2303, 204, 236, 237, 231, 232, 201, 302, 303, 304, 306, 311

MAP NUMBER 34009CIND0A

EFFECTIVE DATE OCTOBER 5, 2017

Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MiT On-Line. This map does not reliect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.go