U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

RECEIVED

JUN 202022

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE Important Follow (the in struction of the pages 10 struction of the pages

CONSTRUCTION OFFICE

Copy all pages of this Elevation Certificate and all attachments for (1) community official. (2) insurance agent/company, and (3) building owner

					ity official, (2) inou	ance agent compan	ry, and (b) banding owner.	
A4 B III 6		TION A - PROPERT	Y INFOR	MATION	No anno anno anno anno anno anno anno an		RANCE COMPANY USE	
A1. Building Owner's Name JW HAND & SON BUILDERS INC. Policy Number:								
A2. Building Stree Box No. 265 86th Street								
City	City State ZIP Code							
Stone Harbor				New Jer		08247	- Annual	
A3. Property Desc Block 86.03 Lots 9		nd Block Numbers, Ta 3	ax Parce	l Number, Le	gal Description, et	c.)		
A4. Building Use (e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.) Residenti	al		
A5. Latitude/Longi	tude: Lat. N	39°03'36.87"	Long. V	V 074°45'15.7	'4" Horizonta	I Datum: NAD 1	1927 × NAD 1983	
A6. Attach at least	2 photograp	hs of the building if th	e Certific	ate is being u	used to obtain floo	d insurance,		
A7. Building Diagra	am Number	7						
A8. For a building	with a crawls	pace or enclosure(s):						
a) Square foo	tage of crawl	space or enclosure(s)		1	1665.00 sq ft			
b) Number of	permanent flo	ood openings in the cr	awlspace	e or enclosure	e(s) within 1.0 foot	above adjacent gra	ade 9	
		penings in A8.b				,		
		igs? ⊠ Yes □ N						
A9. For a building v			NO					
		ed garage		N/A sq ft				
		ood openings in the at				acent grade N/A		
		penings in A9.b				acent grade 14/A	No	
			Market State of the State of th	N/A sq	Ш			
d) Engineered	nood openin	gs?	10					
	SE	CTION B - FLOOD I	INSURA	NCE RATE	MAP (FIRM) INF	ORMATION		
B1. NFIP Communi		•	Commission of Charleson Commission	B2. County	Name		B3. State	
Borough of Stone F	larbor #3453	23		Cape May			New Jersey	
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)	
34009C0242	F	10-05-2017	10-05-2	vised Date 2017	AE	8		
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:								
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:								
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:								
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No								
Designation Date: CBRS OPA								

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE			
265 86th Street					Policy Number:	
City State ZIP Code Constant Stone Harbor New Jersey 08247			Company NAIC Number			
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)						
C1. Building elevations are based on: Construction *A new Elevation Certificate will be required when concept to the Elevations – Zones A1–A30, AE, AH, A (with BFE), Complete Items C2.a–h below according to the build Benchmark Utilized: PID# DP1519 Indicate elevation datum used for the elevations in it NGVD 1929 NAVD 1988 Other/S Datum used for building elevations must be the same a) Top of bottom floor (including basement, crawlspub) Top of the next higher floor c) Bottom of the lowest horizontal structural member d) Attached garage (top of slab) e) Lowest elevation of machinery or equipment serve (Describe type of equipment and location in Comf) Lowest adjacent (finished) grade next to building	on Drawings*	ding Under Construing is complete. FE), AR, AR/A, AR/A in Item A7. In Puerto NAVD 1988 w.	Chec 5.1 12.0 N/A N/A 11.5 4.1	K Finish A1-A30, A hly, enter ck the me feet feet feet feet feet feet	easurement used. meters meters meters meters meters meters meters meters	
g) Highest adjacent (finished) grade next to building	·		<u>4./</u>	⊠ feet	meters	
h) Lowest adjacent grade at lowest elevation of dec structural support	k or stairs, including		4.3	⊠ feet	meters meters	
SECTION D – SURVEYOR,	ENGINEER, OR ARC	HITECT CERTIFIC	CATION	l .		
This certification is to be signed and sealed by a land sur I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment un Were latitude and longitude in Section A provided by a lice	my best efforts to inter der 18 U.S. Code, Sec	pret the data availat tion 1001.	ble. I und	derstand t	ation information. hat any false e if attachments.	
Certifier's Name Robert K. Sanchez	License Number 43294					
Title Professional Land Surveyor Company Name CME Associates Address 203 South Main Street City Cape May Court House Signature Copy all pages of this Elevation Certificate and all attachment		ZIP Code 08210 Telephone (609) 465-3333 īcial, (2) insurance a	Ext.	S H	ace Cal ere d (3) building owner.	
Comments (including type of equipment and location, per The lowest equipment visible at the time of the Survey wa 1540-510. Proj#M2100531.01		dation/crawlspace v	ents are	Smart V	ents Model#	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the o			FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Uni 265 86th Street	it, Suite, and/or Bldg. No.) or P.O.	Route and Box No.	Policy Number:		
City Stone Harbor		ZIP Code 08247	Company NAIC Number		
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)					
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.					
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).					
 a) Top of bottom floor (including baser crawlspace, or enclosure) is 	ment, 		rs above or below the HAG.		
 b) Top of bottom floor (including baser crawlspace, or enclosure) is 	ment,		rs above or below the LAG.		
E2. For Building Diagrams 6–9 with permal the next higher floor (elevation C2.b in	nent flood openings provided in Se	ection A Items 8 and/or	9 (see pages 1–2 of Instructions),		
the diagrams) of the building is			rs above or below the HAG.		
E3. Attached garage (top of slab) is		feet meter	rs above or below the HAG.		
E4. Top of platform of machinery and/or eq servicing the building is	uipment 		rs 🔲 above or 🔲 below the HAG.		
E5. Zone AO only: If no flood depth numbe floodplain management ordinance?	r is available, is the top of the bott Yes No Unknown.	om floor elevated in ac The local official must (cordance with the community's certify this information in Section G.		
SECTION F - PROP	ERTY OWNER (OR OWNER'S R	EPRESENTATIVE) CE	RTIFICATION		
The property owner or owner's authorized recommunity-issued BFE) or Zone AO must s	epresentative who completes Section in Secti	ions A, B, and E for Zo ons A, B, and E are cor	ne A (without a FEMA-issued or rect to the best of my knowledge.		
Property Owner or Owner's Authorized Rep	resentative's Name	9 - 90-11 - 149915 St.			
Address	City	Sta	ate ZIP Code		
Signature	Date	Те	lephone		
Comments	V Venezione				
			Check here if attachments.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY						
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and 265 86th Street	d Box No. Policy Number:					
CityStateZIP CodeStone HarborNew Jersey08247	Company NAIC Number					
SECTION G – COMMUNITY INFORMATION (C	OPTIONAL)					
The local official who is authorized by law or ordinance to administer the community's fl Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable iter used in Items G8–G10. In Puerto Rico only, enter meters.	loodplain management ordinance can complete m(s) and sign below. Check the measurement)				
G1. The information in Section C was taken from other documentation that has be engineer, or architect who is authorized by law to certify elevation information data in the Comments area below.)	een signed and sealed by a licensed surveyor, i. (Indicate the source and date of the elevation					
G2. A community official completed Section E for a building located in Zone A (will or Zone AO.	thout a FEMA-issued or community-issued BFE	≣)				
G3. The following information (Items G4–G10) is provided for community floodpla	in management purposes.					
G4. Permit Number G5. Date Permit Issued 11/09/2-1	G6. Date Certificate of Compliance/Occupancy Issued					
G7. This permit has been issued for: ☐ New Construction ☒ Substantial Impro	ovement					
G8. Elevation of as-built lowest floor (including basement) of the building:	∑ feet ☐ meters Datum _NA∨D ৩ও	mod 2				
G9. BFE or (in Zone AO) depth of flooding at the building site:	☐ feet ☐ meters ☐ Datum Datum NAVD 88	_				
G10. Community's design flood elevation: Higher of BFE+ 2 or 11	Feet meters Datum NAVD88	_				
Local Official's Name Raymond Poudrier Construction Official / Flood Community Name Telephone	Plain Administrator					
Stone Harbor 609-368-6814 Signature Date						
Signature Date 6/20/22						
Comments (including type of equipment and location, per C2(e), if applicable)						
House Raise + Addition						
	Check here if attachment	s.				

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE		
 Building Street Address (including Apt., U 265 86th Street 	Policy Number:		
City	State	ZIP Code	Company NAIC Number
Stone Harbor	New Jersey	08247	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption FRONT VIEW (6/14/2022)

Clear Photo One



Photo Two

Photo Two Caption REAR VIEW (6/14/2022)

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, c	FOR INSURANCE COMPANY USE		
Building Street Address (including 265 86th Street	Apt., Unit, Suite, and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Stone Harbor	New Jersey	08247	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption RIGHT SIDE VIEW (6/14/2022)

Clear Photo Three



Photo Four

Photo Four Caption LEFT SIDE VIEW (6/14/2022)

Clear Photo Four



ICC-ES Evaluation Report

ESR-2074

Reissued February 2021 Revised April 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021, 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

With a minimum of two openings on different sides of each enclosed area.





- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- **6.2** Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com Info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200	
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200	
Wood Wall FloodVENT®	1540 -570	14" X 8 ³ / ₄ "	200	
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200	
SmartVENT® Stacker	1540-511	16" X 16"	400	
FloodVent® Stacker	1540-521	16" X 16"	400	

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

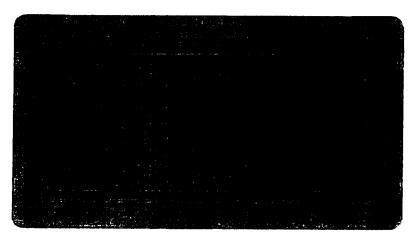


FIGURE 1-SMART VENT: MODEL 1540-510