SUBSTANTIAL IMPROVEMENT

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

# **ELEVATION CERTIFICATE**

Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

	SECT	ION A - PROPERTY	NFORI	MATION		FOR INSUF	RANCE COMPANY USE
A1. Building Owner's Name  Matthew J. & Beverly C. Zehr Revocable Trust  Policy Number:							
A2. Building Street Box No. 261 84th Street							
City Stone Harbor				State New Jersey	<b>-\</b>	ZIP Code 08247	
A3. Property Descr Lots 104 & 106, Blo		d Block Numbers, Tax	Parcel	Number, Legal Des	scription, etc.)		
A4. Building Use (e	.g., Residenti	ial, Non-Residential, A	ddition,	Accessory, etc.)	Residential		
A5. Latitude/Longitu	ude: Lat. <u>N</u> 3	39°-03'-42.5" [	ong. <u>V</u>	/ 74°-45'-13.4"	Horizontal Datum	: NAD 1	927 🗵 NAD 1983
A6. Attach at least	2 photograph	s of the building if the	Certific	ate is being used to	obtain flood insura	ince.	
A7. Building Diagra	m Number _	8					
A8. For a building w	vith a crawlsp	ace or enclosure(s):					
a) Square foot	a) Square footage of crawlspace or enclosure(s)sq ft						
b) Number of p	b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade8						
c) Total net are	c) Total net area of flood openings in A8.b1,600sq in						
d) Engineered	flood opening	gs? ⊠ Yes ☐ No	)				
A9. For a building w	ith an attache	ed garage:					
a) Square foots	age of attache	ed garage 0	;	sq ft			
<ul> <li>a) Square footage of attached garage o sq ft</li> <li>b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 0</li> </ul>							
c) Total net are	a of flood ope	enings in A9.b	0	sq in			
d) Engineered				.       •			
a,gcc.cc		,e	-				
	SEC	CTION B - FLOOD IN	ISURA	NCE RATE MAP	(FIRM) INFORMA	TION	
B1. NFIP Communit Stone Harbor 34532	•	ommunity Number		B2. County Name Cape May County			B3. State New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	E1	RM Panel fective/	B8. Flood Zone(s	(Zoı	se Flood Elevation(s) ne AO, use Base
34009C0242	F	10/05/2017	10/05	evised Date /2017	AE	8.0	od Depth)
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item 89:  [ FIS Profile   FIRM   Community Determined   Other/Source:							
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? ☐ Yes ☒ No							
Designation Date: CBRS  OPA							
J							

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Sec		FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Roc 261 84th Street	ite and Box No.	Policy Number:
CityStateZIPStone HarborNew Jersey082-	Code 47	Company NAIC Number
SECTION C - BUILDING ELEVATION INFORMAT	TION (SURVEY RE	EQUIRED)
C1. Building elevations are based on:  Construction Drawings*  Building elevation Certificate will be required when construction of the building C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFC Complete Items C2.a–h below according to the building diagram specified in Benchmark Utilized:  Middle Twp.CORS ARP (D13828) Vertical Datum: Indicate elevation datum used for the elevations in items a) through h) below  NGVD 1929  NAVD 1988  Other/Source:	ng is complete. FE), AR, AR/A, AR/A in Item A7. In Puerto NAVD 1988	AF AR/A1-A30 AR/AH AR/AO
Datum used for building elevations must be the same as that used for the B	FE.	Oh a da War are a san a
a) Top of bottom floor (including basement, crawlspace, or enclosure floor) b) Top of the next higher floor c) Bottom of the lowest horizontal structural member (V Zones only) d) Attached garage (top of slab) e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments) f) Lowest adjacent (finished) grade next to building (LAG) g) Highest adjacent (finished) grade next to building (HAG) h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support  SECTION D – SURVEYOR, ENGINEER, OR ARC This certification is to be signed and sealed by a land surveyor, engineer, or arch I certify that the information on this Certificate represents my best efforts to interp statement may be punishable by fine or imprisonment under 18 U.S. Code, Section Were latitude and longitude in Section A provided by a licensed land surveyor?  Certifier's Name  License Number Mark J. Gibson Title	4.1 11.1 N/A. N/A. 11.0 3.7 4.1 3.7 HITECT CERTIFIC itect authorized by I aret the data availabout 1001.	CATION
<u> </u>	ZIP Code 08230	Place Seal Here
	(600) 604 4044	Revised 10/24/19 to correct B-1 & B-6 Only
Copy all pages of this Elevation Certificate and all attachments for (1) community office	cial, (2) insurance ag	ent/company, and (3) building owner.
Comments (including type of equipment and location, per C2(e), if applicable) Structure is a 2 story frame residence over masonry block foundation walls and cr. Elevation comprises a 1020 sq. ft. adequately vented crawl space. 8 Smart Vent® provided in exterior foundation walls. Exterior HVAC unit on platform at elev. 11.0.	automatic foundation	d area below the Base Flood on flood vents model no. 1540-510

# · ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information	n from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) c 261 84th Street	or P.O. Route and Box No.	Policy Number:
City State Stone Harbor New Jersey	ZIP Code 08247	Company NAIC Number
SECTION E – BUILDING ELEVATION INF FOR ZONE AO AND ZO	ORMATION (SURVEY NOT NE A (WITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete Items E1–E5. If the Cert complete Sections A, B, and C. For Items E1–E4, use natural grade, if enter meters.  E1. Provide elevation information for the following and check the approach the highest adjacent grade (HAG) and the lowest adjacent grade (a) Top of bottom floor (including basement, crawlspace, or enclosure) is  b) Top of bottom floor (including basement, crawlspace, or enclosure) is  E2. For Building Diagrams 6–9 with permanent flood openings provided the next higher floor (elevation C2.b in the diagrams) of the building is  E3. Attached garage (top of slab) is  E4. Top of platform of machinery and/or equipment servicing the building is  E5. Zone AO only: If no flood depth number is available, is the top of the servicing the building is	ificate is intended to support a available. Check the measure opriate boxes to show whethe (LAG).	r the elevation is above or below  s
floodplain management ordinance? Yes No Unkr		certify this information in Section G.
The property owner or owner's authorized representative who complet community-issued BFE) or Zone AO must sign here. The statements in	es Sections A, B, and E for Zo	ne A (without a FEMA-issued or
Property Owner or Owner's Authorized Representative's Name		
Address	City St	ate ZIP Code
Signature	Date Te	lephone
Comments		
		Check here if attachments.

# ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corr				FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S 261 84th Street	uite, and/or Bldg. No.	) or P.O. Route and Bo	x No.	Policy Number:
City Stone Harbor	State New Jersey	ZIP Code 08247		Company NAIC Number
SECTION	ON G - COMMUNITY	INFORMATION (OPT	IONAL)	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complet	r the community's flood e the applicable item(s)	lplain man and sign	agement ordinance can complete below. Check the measurement
G1. A The information in Section C was take engineer, or architect who is authorized data in the Comments area below.)	en from other docum ed by law to certify e	entation that has been levation information. (In	signed and dicate the	d sealed by a licensed surveyor, source and date of the elevation
G2. A community official completed Sect or Zone AO.	ion E for a building lo	cated in Zone A (withou	ut a FEMA	-issued or community-issued BFE)
G3. The following information (Items G4-	-G10) is provided for	community floodplain m	nanageme	nt purposes.
G4. Permit Number	G5. Date Permit Is			ate Certificate of ompliance/Occupancy Issued
19-13225	3/18	[19		10/21/19
G7. This permit has been issued for:	New Construction	X Substantial Improve	ment	
G8. Elevation of as-built lowest floor (including of the building:	g basement) ——	1 1	<b>▼</b> feet	meters Datum NAVD 1988
G9. BFE or (in Zone AO) depth of flooding at	and banding one	<u>8</u>	<b>½</b> feet	meters Datum NAVD 1968
G10. Community's design flood elevation:		1 0	🔀 feet	meters Datum NAYOFE
Local Official's Name  MICHAEL KOCHTEME	EPE	Title CONST	<b>PUCT</b>	TON OFFICIAL
Community Name  Boreough of STONE	e Harbor	Telephone	1.36	of. 6814
Signature		Date 10 29 1	19	
Comments (including type of equipment and lo	cation, per C2(e), if a		• /	
				Check here if attachments.

## **BUILDING PHOTOGRAPHS**

# OMB No. 1660-0008

See Instructions for Item A6. Expiration Date: November 30, 2018

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including 261 84th Street	Apt., Unit, Suite, and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Stone Harbor	New Jersey	08247	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption Front View Of Residence (Along 84th Street)

**ELEVATION CERTIFICATE** 



Photo Two

Photo Two Caption Right Side View Of Residence

# **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including 261 84th Street	Apt., Unit, Suite, and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Stone Harbor	New Jersey	08247	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One Caption Partial Rear View Of Residence (Along Linden Lane)

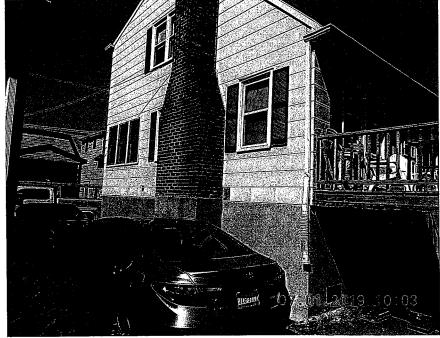


Photo Two Caption Left Side/Partial Front View Of Residence



# **Most Widely Accepted and Trusted**

# **ICC-ES Evaluation Report**

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

**ESR-2074** 

Reissued 02/2019 This report is subject to renewal 02/2021.

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

# **REPORT HOLDER:**

# SMART VENT PRODUCTS, INC.

## **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:

MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574;

#1540-524; #1540-514

FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





# **ICC-ES Evaluation Report**

# **ESR-2074**

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

## Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code<sup>®</sup> (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code<sup>®</sup> (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

## Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

## 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent<sup>®</sup> FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

## 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with \$^1\_{4}\$-inch-by-\$^1\_{4}\$-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation

## 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

### 4.0 DESIGN AND INSTALLATION

# 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

## 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent<sup>®</sup> FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

## 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- **6.2** Test report on air infiltration in accordance with ASTM E283.

## 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1—MODEL SIZES	TABLE	1—MC	DEL	SIZES
---------------------	-------	------	-----	-------

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>

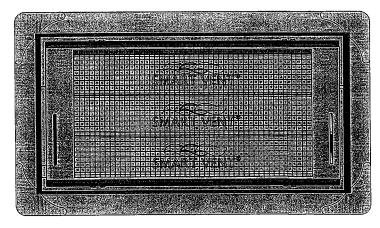


FIGURE 1-SMART VENT: MODEL 1540-510

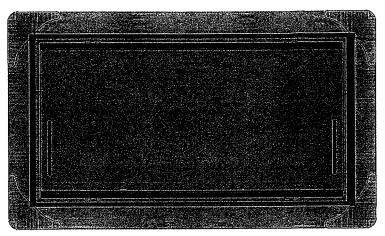


FIGURE 2—SMART VENT MODEL 1540-520

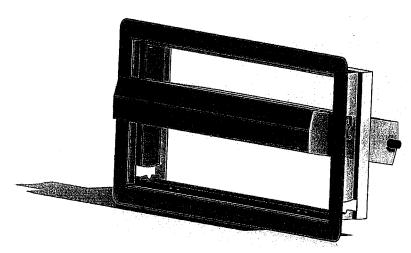


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

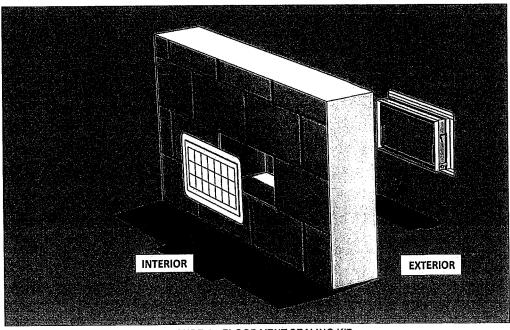


FIGURE 4—FLOOD VENT SEALING KIT



# **ICC-ES Evaluation Report**

# **ESR-2074 CBC and CRC Supplement**

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43-Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMART VENT PRODUCTS, INC.

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

## 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted below

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

## 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 *International Building Code*® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

#### 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code®* (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the International Wildland–Urban Interface Code<sup>®</sup>.

This supplement expires concurrently with the master report, reissued February 2019.



# **ICC-ES Evaluation Report**

# **ESR-2074 FBC Supplement**

Reissued February 2019 This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520: #1540-521: #1540-510: #1540-511: #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the Florida Building Code—Building and the FRC, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2019.

