U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

	SEC	TION A - PROPERT	Y INFOR	MATION		FOR INSU	RANCE COMPANY USE
A1. Building Owne 281 92nd Street, L						Policy Num	iber:
A2. Building Stree Box No. 281 92nd Street	t Address (in	cluding Apt., Unit, Sui	te, and/o	r Bldg. No.) o	or P.O. Route a	Company i	NAIC Number:
City Stone Harbor				State New Jer	-	ZIP Code 08247	, p (1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
A3. Property Desc Block 92.03 Lots		ind Block Numbers, Ta	ax Parce	l Number, Le	gal Description	, etc.)	
A4. Building Use (e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.) Reside	ntial	
A5. Latitude/Longi	tude: Lat. N	39°03'24.33"	Long. V	V 074°45'29.2	4" Horizo	ntal Datum:	1927 X NAD 1983
A6. Attach at leas	l 2 photograp	hs of the building if th	e Certific	ate is being i	used to obtain f	lood insurance.	
A7. Building Diagra	am Number	8					
A8. For a building	with a crawls	space or enclosure(s):					
a) Square foo	tage of craw	space or enclosure(s)		•	1377.00 sq ft		
b) Number of p	permanent flo	ood openings in the cr	awispace	e or enclosur	e(s) within 1.0 f	oot above adjacent gr	ade 7
c) Total net ar	ea of flood o	penings in A8.b	1	328.00 sq ir	1		
d) Engineered	l flood openir	ngs? 🗵 Yes 🗌 t	No				
A9. For a building v	vith an attact	ned garage:					į
a) Square foot	age of attach	ned garage		N/A sq fl			
b) Number of p	oermanent flo	ood openings in the at	tached g	arage within	1.0 foot above	adjacent grade N/A	
c) Total net are	ea of flood op	penings in A9.b		N/A sq	in		
d) Engineered	flood openin	gs? 🗌 Yes 🔀 N	No.				
	SF	CTION B - FLOOD	NSURA	NCE RATE	MAP /FIRM\ II	NEORMATION	***************************************
B1. NFIP Commun		 		B2. County		W OKNING TO THE PARTY OF THE PA	B3. State
Borough of Stone H	-	•		Cape May			New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	IM Panel ective/ rised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, us	I levation(s) e Base Flood Depth)
34009C242	F	10-05-2017	10-05-2		AE	9	
		Base Flood Elevation	•		<u>-</u>	red in Item B9;	!
FIS Profile	∍ ⊠ FIRM	Community Deter	mined [Other/Sou	rce:		
B11. Indicate eleva	ation datum u	sed for BFE in Item B	9: 🔲 N	GVD 1929	⊠ NAVD 1988	Other/Source:	
B12. Is the building	g located in a	Coastal Barrier Reso	urces Sy	rstem (CBRS) area or Other	wise Protected Area (0	OPA)? ☐ Yes ⊠ No
Designation I	Date:		CBRS	☐ OPA			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	information from Sec	tion A.	FOR I	NSURANC	E COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or 281 92nd Street	r Bldg. No.) or P.O. Rou	te and Box No.	Policy	Number:	
City Sta	te ZIP	Code	Comp	any NAIC I	Number
Stone Harbor Ne	w Jersey 0824	7			
SECTION C – BUILDING EL	EVATION INFORMAT	ION (SURVEY RI	EQUIR	ED)	
C1. Building elevations are based on: Construction	on Drawings*	ling Under Constru	ction*		hed Construction
*A new Elevation Certificate will be required when c	onstruction of the buildir	ng is complete.			
C2. Elevations - Zones A1-A30, AE, AH, A (with BFE),	VE, V1-V30, V (with BF	E), AR, AR/A, AR	AE, AR	K/A1-A30, /	AR/AH, AR/AO.
Complete Items C2.a–h below according to the buil Benchmark Utilized: PID# DP1521	ding diagram specified in Vertical Datum:		o Rico	only, enter	meters.
Indicate elevation datum used for the elevations in i	tems a) through h) below	v.			
☐ NGVD 1929 ☐ NAVD 1988 ☐ Other/ ☐ Other / □ Othe	Source:				
Datum used for building elevations must be the sam	ne as that used for the B	FE.	Ch	ack the me	easurement used.
a) Top of bottom floor (including bosoment, organic	and or analogues floor)		6.4	ieck the me	meters
a) Top of bottom floor (including basement, crawlsp	bace, or enclosure floor)		11.2	⊠ feet	☐ meters
b) Top of the next higher floor		-			
c) Bottom of the lowest horizontal structural member	er (V Zones only)		N/A	⊠ feet	meters
d) Attached garage (top of slab)			N/A	★ feet	meters
e) Lowest elevation of machinery or equipment ser (Describe type of equipment and location in Con	vicing the building nments)		11.0	× feet	meters
f) Lowest adjacent (finished) grade next to building	(LAG)		5.0	★ feet	□ meters
g) Highest adjacent (finished) grade next to building	g (HAG)		6.3	★ feet	meters meters
 h) Lowest adjacent grade at lowest elevation of dec structural support 	ck or stairs, including		4.6	⊠ feet	meters
SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION					
This certification is to be signed and sealed by a land su I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment ur	s my best efforts to inter	oret the data availa	law to	certify elev	ration information. that any false
Were latitude and longitude in Section A provided by a li	censed land surveyor?	⊠Yes □ No	\times	Check her	e if attachments.
Certifier's Name	License Number				
Steven C. Woodrow	27514				
Title Professional Land Surveyor				-	
			-	P	lace
Company Name Dante Guzzi engineering Associates				S	Seal
Address 418 Stokes Road					ere
City	State	ZIP Code			
Medford	New Jersey	08055			
Signature Steven C. Woodin	Date 09-21-2020	Telephone (609) 654-4440	Ext.		
Copy all pages of this Elevation Certificate and all attachme	ents for (1) community of	icial, (2) insurance	agent/c	ompany, an	d (3) building owner.
Comments (including type of equipment and location, pe The lowest equipment visible at the time of the Survey w Model# 1540-510 certified to provide 200 SF of flood pro	as the NVAC unit locate				
for a total of 1328 Sq.In. From the outside some vents appear to be too high they are within 1 foot of the crawl space elevation, the bottom of the flood vents are at elevation 7.0 & the crawl space is at elevation is 6.4					
DGEA Proj# C-19-311 11/16/2020 REVISED LOWEST EQUIPMENT ELEVATION	ON				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspond	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, an 281 92nd Street	id/or Bldg. No.) or P.O. Ro	oute and Box No.	Policy Number:
City Stone Harbor		P Code 247	Company NAIC Number
SECTION E – BUILDING EI FOR ZON	LEVATION INFORMATI IE AO AND ZONE A (W		REQUIRED)
For Zones AO and A (without BFE), complete items E complete Sections A, B,and C. For Items E1–E4, use enter meters.	1–E5. If the Certificate is natural grade, if available	intended to support a . Check the measure	LOMA or LOMR-F request, ment used. In Puerto Rico only,
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest a) Top of bottom floor (including basement,	d check the appropriate background adjacent grade (LAG).	oxes to show whethe	r the elevation is above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,			s 🔲 above or 📋 below the HAG.
crawispace, or enclosure) is		feet _ meter	s 🔲 above or 📋 below the LAG.
E2. For Building Diagrams 6–9 with permanent flood the next higher floor (elevation C2.b in	openings provided in Sec		
the diagrams) of the building is E3. Attached garage (top of slab) is		☐ feet ☐ meter	
E4. Top of platform of machinery and/or equipment			
servicing the building is E5. Zone AO only: If no flood depth number is available	ale is the top of the bottor	. [] feet [] meter	
floodplain management ordinance? Yes	No Unknown. Ti	he local official must o	certify this information in Section G.
SECTION F - PROPERTY OW	NER (OR OWNER'S RE	PRESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representat community-issued BFE) or Zone AO must sign here. T	ive who completes Section he statements in Section	ons A, B, and E for Zo s A, B, and E are con	ne A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative	e's Name	 +	44 114 114 114 114 114 114 114 114 114
Address	City	Sta	ate ZIP Code
Signature	Date	Те	lephone
Comments			
			1
			Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. 281 92nd Street	Policy Number:					
City State ZIP Code Stone Harbor New Jersey 08247	Company NAIC Number					
SECTION G - COMMUNITY INFORMATION (OPTIONAL)						
The local official who is authorized by law or ordinance to administer the community's floodplain ma Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign used in Items G8–G10. In Puerto Rico only, enter meters.	nagement ordinance can complete below. Check the measurement					
G1. The information in Section C was taken from other documentation that has been signed at engineer, or architect who is authorized by law to certify elevation information. (Indicate the data in the Comments area below.)						
G2. A community official completed Section E for a building located in Zone A (without a FEM) or Zone AO.	A-issued or community-issued BFE)					
G3. The following information (Items G4–G10) is provided for community floodplain managem	ent purposes.					
	Date Certificate of Compliance/Occupancy Issued ス / 1 5 / か み ご					
G7. This permit has been issued for: Wew Construction Substantial Improvement	1 /					
G8. Elevation of as-built lowest floor (including basement) [], 2 [X feet	□ meters Datum NAVD 88					
	☐ meters Datum NAVD88					
G10. Community's design flood elevation: Higher of BFE+2 or ∏ ✓ feet	meters Datum NAVD88					
Local Official's Name Raymond Poudrier Construction Official/Floor Community Name Telephone	d Plain Manager					
Raymond Poudrier Construction Official/Floor Community Name Telephone (609) 368-6814						
Signature Date 12/15/2020						
Comments (including type of equipment and location, per C2(e), if applicable)						
	Check here if attachments.					

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 281 92nd Street City State ZIP Code Company NAIC Number Stone Harbor **New Jersey** 08247

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

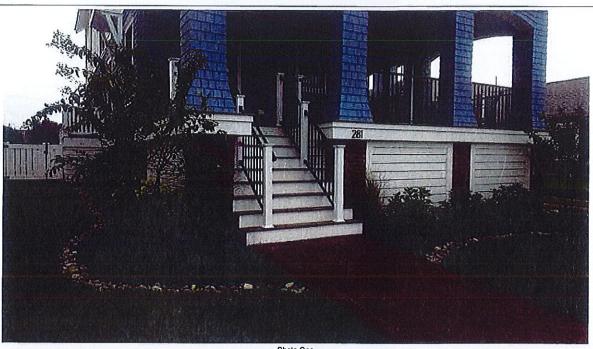


Photo One

Photo One Caption FRONT VIEW (09/18/2020)

ELEVATION CERTIFICATE

Clear Photo One



Photo Two Caption REAR VIEW (09/18/2020)

Clear Photo Two

Photo Two

BUILDING PHOTOGRAPHS

Osstisuation Descri

OMB No. 1660-0008

Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Continuation Page

IMPORTANT: In these spaces, co	ppy the corresponding information	from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including 281 92nd Street	Apt., Unit, Suite, and/or Bldg. No.) or	P.O. Route and Box No	p. Policy Number:
City	State	ZIP Code	Company NAIC Number
Stone Harbor	New Jersey	08247	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

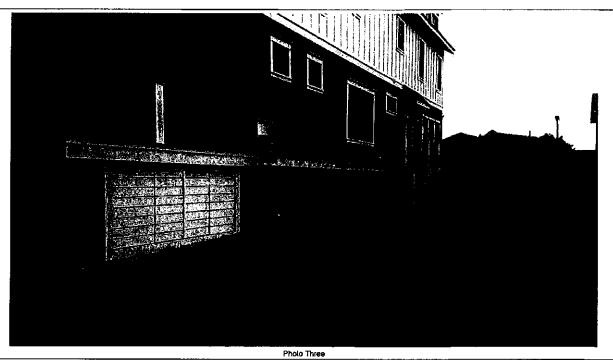


Photo Three Caption RIGHT SIDE VIEW (09/18/2020)

Clear Photo Three

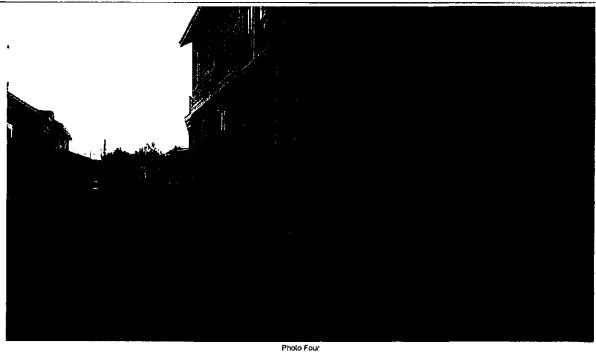


Photo Four Caption LEFT SIDE VIEW (09/18/2020)

Clear Photo Four



ICC-ES Evaluation Report

ESR-2074

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

 $^{\dagger}\text{The ADIBC}$ is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square

feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT[®] models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE	1-MODEL	SIZES
-------	---------	-------

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m2

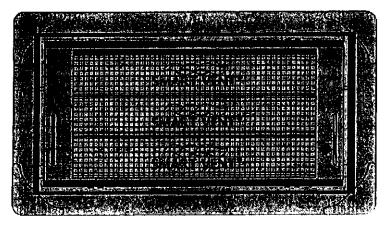


FIGURE 1-SMART VENT: MODEL 1540-510