U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

		TION A - PROPERT	Y INFOF	RMATION			FOR INSUR	ANCE COMPANY USE
A1. Building Own Wayne E Rapine		S Rapine					Policy Numb	per:
A2. Building Stree Box No. 11857 Paradise D		ncluding Apt., Unit, Sui	ite, and/o	or Bldg. No.)	or P.O. F	Route and	Company N.	AIC Number:
City Stone Harbor				State New Je	•	*****	ZIP Code 08247	_
A3. Property Desc Block 209 Lot 2	oription (Lot a	and Block Numbers, Ta	ax Parce	l Number, Le	gal Des	cription, etc.)		
A4. Building Use ((e.g., Resider	ntial, Non-Residential,	Addition	ı, Accessory,	etc.)	Residential		
A5. Latitude/Longi	itude: Lat. <u>N</u>	l 39°02'23.93"	Long. V	V 074°46′32.6	36"	Horizontal Da	atum: [] NAD 1	927 × NAD 1983
A6. Attach at leas	t 2 photograp	hs of the building if th	e Certific	ate is being	used to	obtain flood in	surance.	
A7. Building Diagra	am Number	8						
A8. For a building	with a crawls	space or enclosure(s):						
a) Square foo	tage of crawl	lspace or enclosure(s)) <u> </u>		1587.00	sq ft		
		ood openings in the cr	awlspac	e or enclosur	e(s) with	in 1.0 foot ab	ove adjacent grad	je 8
c) Total net ar	ea of flood o	penings in A8.b	1	1600.00 sq ir	n			
d) Engineered	flood openin	ngs? 🗵 Yes 🗌 N	10					
A9. For a building v	vith an attach	ied garage:						
a) Square foot	age of attach	ied garage		340.00 sq ft	t			
b) Number of p	permanent flo	ood openings in the at	- tached g	arage within	1.0 foot :	above adjace	nt grade 3	
		penings in A9.b		600.00 sq			<u> </u>	
d) Engineered	flood openin	gs? ⊠ Yes □ N	10		•			
	95	CTION B. FLOOD	LIGHTA A	NOT DATE		TOTAL INTOR		
B1. NFIP Communi	·· ·· ·	COMMUnity Number	NSURA	B2. County		IRM) INFOR		D2 04-4-
Borough of Stone H	larbor #3453	23		Cape May	name		l l	B3. State New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. Flo Zone(s		9. Base Flood Ele (Zone AO, use	evation(s) Base Flood Depth)
34009C0242	F	10-05-2017	10-05-2		AE & V	/E 9.	0 & 11.0	:
B10. Indicate the se	ource of the I	Base Flood Elevation	(BFE) da	ata or base flo	ood dept	h entered in l	tem B9:	
☐ FIS Profile	∷ ⊠ FIRM	Community Deterr	mined [☐ Other/Sou	rce:			
B11. Indicate eleva	ition datum u	sed for BFE in Item B	9: 🗌 N	GVD 1929	⊠ NAVI	D 1988 🗌	Other/Source:	
B12. Is the building	located in a	Coastal Barrier Resor	urces Sy	stem (CBRS) area or	Otherwise P	otected Area (OI	PA)? ☐ Yes ⊠ No
Designation C				OPA			·	
				_				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding	g information from S	ection A.	FOR IN	SURANC	CE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/o			1	Number:	AL COMM PART COL
City Sta Stone Harbor Ne		P Code 247	Compa	ny NAIC I	Number
SECTION C – BUILDING EL	EVATION INFORM	ATION (SURVEY RE	EQUIRE	D)	
C1. Building elevations are based on: Constructi *A new Elevation Certificate will be required when concentrations. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), Complete Items C2.a–h below according to the build Benchmark Utilized: PID# DP1541 Indicate elevation datum used for the elevations in image in NGVD 1929 NAVD 1988 Other/Delay Datum used for building elevations must be the same a) Top of bottom floor (including basement, crawlspan) Top of the next higher floor	on Drawings*	uilding Under Construding is complete. BFE), AR, AR/A, AR/A d in Item A7. In Puerton: NAVD 1988 ow. BFE.	Chec	⊠ Finisl	asurement used.
c) Bottom of the lowest horizontal structural member	or Al Zonos only)	•	1.0000000000	⊠ feet	☐ meters
d) Attached garage (top of slab)	i (v Zones only)		polisi osereni	⊠ feet	meters
e) Lowest elevation of machinery or equipment sen (Describe type of equipment and location in Com-	vicing the building ments)			⊠ feet	meters
f) Lowest adjacent (finished) grade next to building	(LAG)		6.70	× feet	meters
g) Highest adjacent (finished) grade next to building	(HAG)	-	7.50	× feet	meters
h) Lowest adjacent grade at lowest elevation of dec structural support	k or stairs, including	-	7.50 [× feet	meters
SECTION D – SURVEYOR,				A STATE OF THE PARTY OF THE PAR	
This certification is to be signed and sealed by a land sur I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment un	my best efforts to inte der 18 U.S. Code, Se	rpret the data availat ction 1001.	law to ce ble. I und	rtify eleva erstand ti	ation information. nat any false
Were latitude and longitude in Section A provided by a lic	ensed land surveyor?	⊠ Yes □ No	⊠ CI	heck here	if attachments.
Certifier's Name Steven C. Woodrow	License Number 27514				
Title Land Surveyor					
Company Name			-	P	ace
Dante Guzzi Engineering Associates				S	eal
Address 418 Stokes Road				H	ere
City Medford	State New Jersey	ZIP Code 08055			
Signature Stan C Wodn	Date 9/06/2019	Telephone (609) 654-4440	Ext.		
Copy all pages of this Elevation Certificate and all attachmen	nts for (1) community o	fficial, (2) insurance aç	gent/com	pany, and	(3) building owner.
Comments (including type of equipment and location, per Property is located in AE 9.0 and VE 11.0. Entire structure located along bulkhead line. The lowest equipment visible HVAC units located outside the building are at elevation 1 crawl space foundation, Model# 1540-570 (3) in garage, a DGEA Proj# C-19-391	e located in AE 9.0 and e at the time of the Su 0.10. All vents are "Si	vey was the heater lo MART VENT" Model #	ocated in	side the g	arage area The

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspond	ing information from S	ection A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and 11857 Paradise Drive	l/or Bldg. No.) or P.O. Ro	oute and Box No.	Policy Number:
and the second s		Code 247	Company NAIC Number
SECTION E – BUILDING EL FOR ZONE	EVATION INFORMATI E AO AND ZONE A (W	ON (SURVEY NOT ITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete Items E1 complete Sections A, B,and C. For Items E1–E4, use n enter meters.	–E5. If the Certificate is i atural grade, if available.	ntended to support a Check the measure	LOMA or LOMR-F request, ment used. In Puerto Rico only,
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest a a) Top of bottom floor (including basement,	check the appropriate bo idjacent grade (LAG).	oxes to show whether	the elevation is above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		☐ feet ☐ meter	
crawlspace, or enclosure) is E2. For Building Diagrams 6–9 with permanent flood of	penings provided in Sect	feet	
the next higher floor (elevation C2.b in the diagrams) of the building is		☐ feet ☐ meter	
E3. Attached garage (top of slab) is		feet meters	above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is		feet meters	
E5. Zone A0 only: If no flood depth number is available floodplain management ordinance? Yes	is the top of the bottom No Unknown. Th	nfloor elevated in acc e local official must c	cordance with the community's ertify this information in Section G.
SECTION F - PROPERTY OWN	ER (OR OWNER'S REF	RESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	e who completes Section e statements in Sections	ns A. B, and E for Zor A, B, and E are corr	ne A (without a FEMA-issued or ect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's	3 Name		
Address	City	Sta	te ZIP Code
Signature	Date	Tel	ephone
Comments			
			Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the cor			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, \$ 11857 Paradise Drive	Suite, and/or Bldg. No.) or	P.O. Route and Box I	No. Policy Number:
City Stone Harbor	State New Jersey	ZIP Code 08247	Company NAIC Number
SECTI	ON G - COMMUNITY IN	FORMATION (OPTIO	NAL)
The local official who is authorized by law or of Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, etc.	n Certificate. Complete th	e community's floodpla e applicable item(s) a	ain management ordinance can complete nd sign below. Check the measurement
G1. The information in Section C was tal engineer, or architect who is authorited data in the Comments area below.)	ken from other documenta zed by law to certify eleva	ation that has been sig ution information. (Indi	gned and sealed by a licensed surveyor, cate the source and date of the elevation
or∠one AO.			a FEMA-issued or community-issued BFE)
G3. The following Intermation (items G4-	-G10) is provided for com	ımunity floodplain mar	nagement purposes.
G4. Permit Number	G5. Date Permit Issued	d	G6. Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:]New Construction ☐ S	Substantial Improveme	ent
G8. Elevation of as-built lowest floor (including of the building:	g basement)		feet meters Datum
G9. BFE or (in Zone AO) depth of flooding at	the building site:		feet meters Datum
G10. Community's design flood elevation:			feet meters Datum
Local Official's Name		Title	
Community Name	•	Telephone	
Signature		Date	
Comments (including type of equipment and loc	cation, per C2(e), if applic	able)	Check here if attachments.
			 Oneck nere if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2018

		The state of the s	Expiration Bato. November 00, 2010
IMPORTANT: In these spaces, cop			FOR INSURANCE COMPANY USE
Building Street Address (including A 11857 Paradise Drive	Policy Number:		
City Stone Harbor	State New Jersey	ZIP Code 08247	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

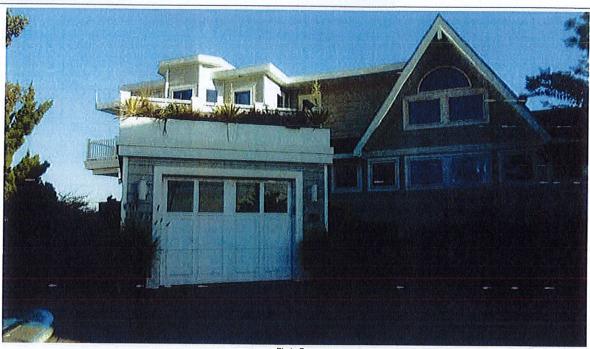


Photo One

Photo One Caption FRONT VIEW (08/30/2019)

Clear Photo One



Photo Two Caption REAR VIEW (08/30/2019)

Clear Photo Two

BUILDING PHOTOGRAPHS

OMB No. 1660-0008

ATION CERTIFICATE Continuation Page		Expiration Date: November 30, 2018			
IMPORTANT: In these spaces, copy the corresponding information from Section A.					
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 11857 Paradise Drive					
State New Jersey	ZIP Code 08247	Company NAIC Number			
	responding information tuite, and/or Bldg. No.) or State	responding information from Section A. suite, and/or Bldg. No.) or P.O. Route and Box No. State ZIP Code			

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption VENTS UNDER DECK (08/30/2019)

ELEVATION CERTIFICATE

Clear Photo Three

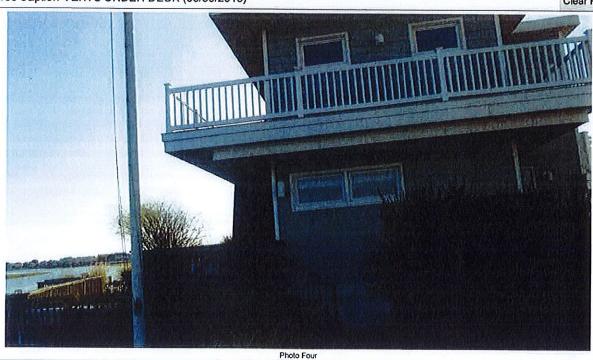


Photo Four Caption LEFT SIDE VIEW (08/30/2019)

Clear Photo Four



ICC-ES Evaluation Report

ESR-2074

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1549-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC, 2009 IBC code sections referenced In this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square

feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT[®] Model #1540-520. When Installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®]	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For Si: 1 inch = 25.4 mm; 1 square foot = m2

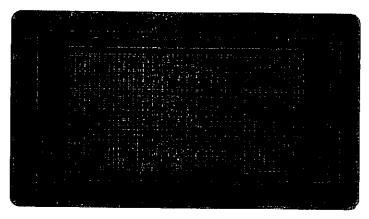


FIGURE 1-SMART VENT: MODEL 1540-510