U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

MAY 23 2022

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

S	ECTION A - PROPERT	Y INFOR	MATION			FORUNSUI	RANCE COMPANY USE
A1. Building Owner's Name	·				Lore	Policy Num	ber
Brian and Desiree Kennedy							
A2. Building Street Address Box No. 163 83rd Street	(including Apt., Unit, Sui	te, and/c	r Bldg. No.) o	r P.O. Route and	I	Company N	IAIC Number:
City Stone Harbor			State New Jer	sey		ZIP Code 08247	
A3. Property Description (Lo Block 83.02 Lot 56 & 58	t and Block Numbers, T	ax Parce	l Number, Le	gal Description, e	etc.)		
A4. Building Use (e.g., Resi	dential, Non-Residential,	Addition	, Accessory,	etc.) Resident	ial		
A5. Latitude/Longitude: La	. N 39°03'40.82"	Long. V	V 074°45'03.3	0" Horizont	al Dat	um: NAD	1927 🔀 NAD 1983
A6. Attach at least 2 photog	aphs of the building if th	e Certific	cate is being u	used to obtain flo	od ins	urance.	,
A7. Building Diagram Numb	er <u>8</u>						
A8. For a building with a cra	wlspace or enclosure(s):						
a) Square footage of cr	awlspace or enclosure(s))		1368.00 sqft			
b) Number of permanen	flood openings in the cr	rawlspac	e or enclosure	e(s) within 1.0 foo	t abov	ve adjacent gra	ide 7
c) Total net area of floor	openings in A8.b	•	1400.00 sq in				
d) Engineered flood ope	nings? 🗵 Yes 🗌 I	No					
A9. For a building with an att	ached garage:						
a) Square footage of attached garageN/A sq ft							
b) Number of permanen	flood openings in the at	tached g	arage within	1.0 foot above ac	ljacen	t grade N/A	
c) Total net area of flood	openings in A9.b		N/A sq	in			
d) Engineered flood ope	nings? Yes 🖂 l	Vo					
	SECTION B - FLOOD	INSURA	NCE RATE	MAP (FIRM) IN	FORM	IATION	
B1. NFIP Community Name Borough of Stone Harbor #34			B2. County Cape May	Name			B3. State New Jersey
Borough of Otonic Harbor no		·	L capo may				Trow delacy
B4. Map/Panel B5. Suff Number	x B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9.	Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)
34009C0242 F	10-05-2017	10-05-2		AE	8		
B10. Indicate the source of t	ne Base Flood Elevation	(BFE) da	ata or base flo	ood depth entere	d in Ite	em B9:	
B11. Indicate elevation datu	n used for BFE in Item E	89: 🗌 N	GVD 1929 [☑ NAVD 1988		Other/Source:	
B12. Is the building located in	n a Coastal Barrier Resc	ources Sy	stem (CBRS)	area or Otherwi	se Pro	otected Area (C	PA)? ☐ Yes ⊠ No
Designation Date:		CBRS	□ ОРА				CASA CASA

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Su 163 83rd Street	ilte, and/or Bldg. No.) or P.C	D. Route and Box No.	Policy Number:
City Stone Harbor	State New Jersey	ZIP Code 08247	Company NAIC Number
SECTION C - BUIL	DING ELEVATION INFO	RMATION (SURVEY RI	EQUIRED)
*A new Elevation Certificate will be require C2. Elevations – Zones A1–A30, AE, AH, A (v Complete Items C2.a–h below according to Benchmark Utilized: PID#DP1519 Indicate elevation datum used for the elev NGVD 1929 NAVD 1988	ed when construction of the with BFE), VE, V1–V30, V (w to the building diagram spec Vertical Da vations in items a) through h Other/Source:	vith BFE), AR, AR/A, AR/ cified in Item A7. In Puert atum: <u>NAVD 1988</u>) below.	/AE. AR/A1-A30. AR/AH. AR/AO.
Datum used for building elevations must b	e the same as that used for	the BFE.	Check the measurement used.
a) Top of bottom floor (including basements) b) Top of the next higher floor c) Bottom of the lowest horizontal structure (b) Attached access (top of slot)		floor)	
 d) Attached garage (top of slab) e) Lowest elevation of machinery or equipment and location 	oment servicing the building on in Comments)		N/A ☐ feet ☐ meters 11.3 ☐ feet ☐ meters
f) Lowest adjacent (finished) grade next t	3		6.7 X feet meters
g) Highest adjacent (finished) grade next	to building (HAG)	The second secon	6.9 X feet meters
h) Lowest adjacent grade at lowest elevat structural support	tion of deck or stairs, includi	ng	6.9 🗵 feet 🗌 meters
	RVEYOR, ENGINEER, OR		
This certification is to be signed and sealed by I certify that the information on this Certificate r statement may be punishable by fine or imprison Were latitude and longitude in Section A provide	represents my best efforts to onment under 18 U.S. Code	o interpret the data availa , Section 1001. 	law to certify elevation information. ble. I understand that any false Check here if attachments.
Certifier's Name Robert K. Sanchez	License Number 43294	r	
Title Professional Land Surveyor			Place
Company Name CME Associates			Seal
Address 203 Main Street			Here
City Cape May Court House	State New Jersey	ZIP Code 08210	
Signature	5/25/2022	Telephone (609) 465-3333	Ext.
Copy all pages of this Elevation Certificate and all	l attachments for (1) commun	nity official, (2) insurance a	gent/company, and (3) building owner.
Comments (including type of equipment and loc The lowest equipment visible at the time of the s model #1540-510.			a crawl space with 7 smart vents
Our File No. M2100026.01			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

	ORTANT: In these spaces, copy the correspond				FOR INSURA	NCE COMPANY USE
163	ding Street Address (including Apt., Unit, Suite, an 83rd Street	d/or Bldg. No.)	or P.O. Rou	ite and Box No.	Policy Numbe	r:
City Stor		State New Jersey	ZIP 082	Code 47	Company NAI	C Number
SECTION E BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)						
com	For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.					
E1.	E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).a) Top of bottom floor (including basement,					s above or below
	crawlspace, or enclosure) is b) Top of bottom floor (including basement, crawlspace, or enclosure) is	·		☐ feet ☐ met	_	below the HAG.
E2.	For Building Diagrams 6–9 with permanent flood of	penings provid	ed in Section	feet met on A Items 8 and/o		r below the LAG. -2 of Instructions).
	the next higher floor (elevation C2.b in the diagrams) of the building is		·····	feet met	_	r below the HAG.
E3.	Attached garage (top of slab) is			feet met	ers 🗌 above o	r 🗌 below the HAG.
E4.	Top of platform of machinery and/or equipment servicing the building is	·		☐ feet ☐ met	ers 🗌 above o	r
E5.	Zone AO only: If no flood depth number is availab floodplain management ordinance? Yes	le, is the top of] No 🏻 Unki	the bottom	floor elevated in a local official mus	accordance with the total transfer to the control of the control o	ne community's nation in Section G.
	SECTION F - PROPERTY OW	NER (OR OWN	ER'S REPF	RESENTATIVE) (CERTIFICATION	
The com	property owner or owner's authorized representati munity-issued BFE) or Zone AO must sign here. T	ve who complet he statements i	tes Sections n Sections	s A, B, and E for Z A, B, and E are co	Zone A (without a price to the best of	FEMA-issued or of my knowledge.
Prop	perty Owner or Owner's Authorized Representative	's Name	<u>.</u>			
Add	ress		City	Ş	State	ZIP Code
Sigr	ature		Date		elephone	
Corr	ments				<u></u>	
					Check l	nere if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	esponding informatio	on from Section A.	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, States 163 83rd Street	uite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:		
City Stone Harbor	State New Jersey	ZIP Code 08247	Company NAIC Number		
SECTIO	ON G - COMMUNITY I	NFORMATION (OPTIONAL)	<u> </u>		
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	i Certificate. Complete t	the community's floodplain ma the applicable item(s) and sign	nagement ordinance can complete n below. Check the measurement		
G1. The information in Section C was take engineer, or architect who is authoriz data in the Comments area below.)	en from other documer ed by law to certify ele	ntation that has been signed a vation information. (Indicate th	nd sealed by a licensed surveyor, le source and date of the elevation		
G2. A community official completed Secti or Zone AO.	on E for a building loca	ated in Zone A (without a FEM	A-issued or community-issued BFE)		
G3. The following information (Items G4–	G10) is provided for co	mmunity floodplain managem	ent purposes.		
G4. Permit Number 21-690	G5. Date Permit Issu		Date Certificate of Compliance/Occupancy Issued		
G7. This permit has been issued for:	New Construction	Substantial Improvement			
G8. Elevation of as-built lowest floor (including of the building:	basement)	<u>3</u> ⊠ feet	meters Datum NAVD 87		
G9. BFE or (in Zone AO) depth of flooding at t	he building site: A	E 8 ⊠ feet	meters Datum NAVD 87		
G10. Community's design flood elevation:	Higher of B	BFE+ 2 or	☐ meters Datum <u>₩ Av D 《 8</u>		
Local Official's Name Raymond Poudrier	Construction	Title Official / Flood Telephone	Plain Mangar		
Raymond Poudrier Community Name Stone Harbor		Telephone 68-6814			
Signature A A	5-/	74/72	<u></u>		
Comments (including type of equipment and local	ation, per C2(e), if appl	licable)			
			Check here if attachments.		

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.

163 83rd Street

City State ZIP Code Company NAIC Number

Stone Harbor New Jersey 08247

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

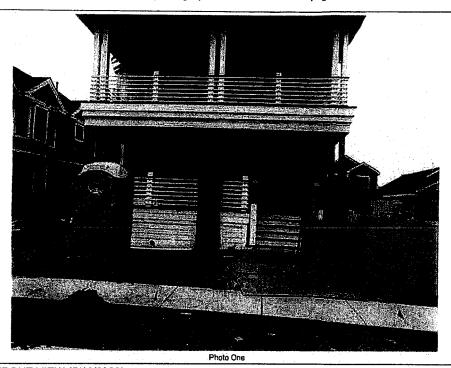


Photo One Caption FRONT VIEW (5/13/2022)

Clear Photo One

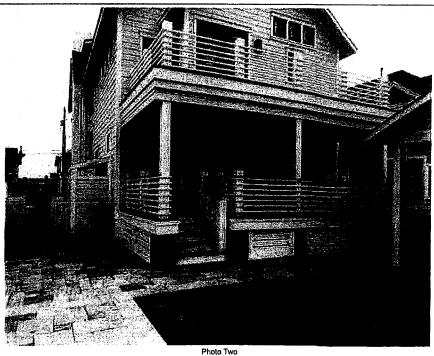


Photo Two Caption REAR VIEW (5/13/2022)

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, o	FOR INSURANCE COMPANY USE Policy Number:		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 163 83rd Street			
City	State	ZIP Code	Company NAIC Number
Stone Harbor	New Jersey	08247	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

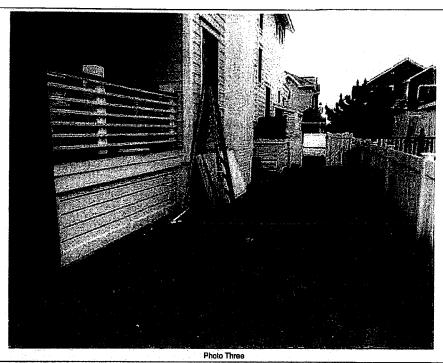


Photo Three Caption RIGHT SIDE VIEW (5/13/2022)

Clear Photo Three

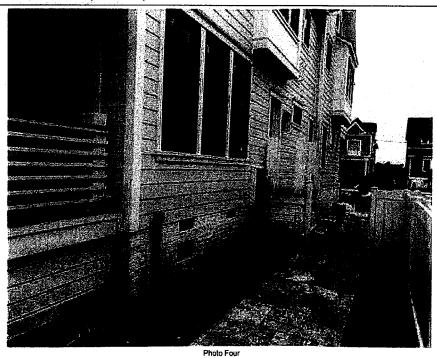


Photo Four Caption LEFT SIDE VIEW (5/13/2022)

Clear Photo Four



ICC-ES Evaluation Report

ESR-2074

Reissued February 2021 Revised April 2021 This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- **2021**, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021, 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

¹The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

■ With a minimum of two openings on different sides of each enclosed area.



- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200	
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200	
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200	
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200	
SmartVENT® Stacker	1540-511	· 16" X 16"	400	
FloodVent® Stacker	1540-521	16" X 16"	400	

For SI: 1 inch = 25.4 mm; 1 square foot = m²

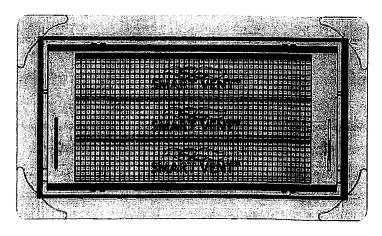


FIGURE 1-SMART VENT: MODEL 1540-510